

Hello I am **Alfred**



ALF-IC

Interconnect Kit

SMART, SECURE, SLEEK AND SUPREMELY FLEXIBLE

Interconnect Kit for Alfred Smart Locks

With simplicity, flexibility and innovation always in mind, the Alfred Interconnect Kit quickly and easily converts ANY of Alfred's wide range of smart deadbolts to a code-compliant interconnect lock with single-motion egress functionality. Complete with multiple lever options, sleek profile, and finishes to match your Alfred lock of choice, this unique accessory leverages the Alfred team's decades of industrial, mechanical lock manufacturing, leading to a robust yet minimalist commercial grade solution.

This revolutionary, retrofit-style approach is a first-of-its-kind, allowing installers and property owners alike to maintain continuity across all of their properties, whether requiring single-motion egress or not. As building codes and compliance rules change over time, existing Alfred locks can also be quickly and easily upgraded to an interconnect style lock with minimal effort and unmatched cost-effectiveness.

One kit to fit them all! UL/ULc Fire-Rated, pre-packed with all 3 standard strike styles (4-7/8" ASA, T-Strike, and Full Lip D-Strike), 1" wide square and radius corner latchplate options, plus a 1-1/8" Filler, simply choose a lever and finish and you are ready for near any situation.

LEARN MORE AT ALFREDLOCKS.COM



choose your Alfred smart lock



Alfred

DB1-PRO

SOLD SEPARATELY



Alfred

DB2-B

SOLD SEPARATELY



Alfred

DB2S

SOLD SEPARATELY

Works with all keyed Alfred Smart Door Locks.
Choose the lock of your choice that fits your projects needs.




Alfred Interconnect Kit Specifications



INTERCONNECT SPECIFICATIONS

ANSI/BHMA	Conforms to Grade 2
Latch	2-3/4" backset std. 2-3/8" available upon request backset, 1" round corner narrow faceplate standard. Square corner optional.
Strikes	Deadbolt: 1-1/8" x 2-3/4" square corner with reinforcing plate. Lever: Triple packed with 4-7/8" ASA, T-Strike, and Full Lip D-Strike.
Finish	US19 Black, US15 Satin Nickel
Door Prep	Edge bore 1", latch mortise 1" x 2-1/4", cross bores 2-1/8", 5-1/2" Center to Center.
Door Thickness	Min. 1-3/8", Max 1-3/4".
Door Handing	Non-Handed Design.
U.L.	UL10C 20-Min Fire Rated, *90-Min Fired Rating available upon request
Warranty	Lifetime mechanical, 2 year finish.

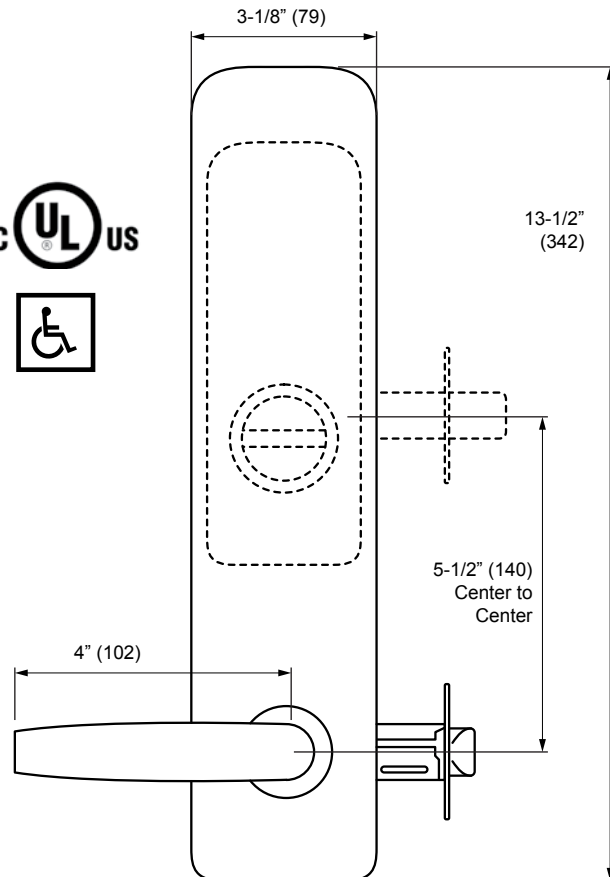

LEVER STYLES

MODEL:
S1 LEVER



MODEL:
R1 LEVER



Available in both Black and Satin Nickel finishes.

*Multiple lever styles available during order process, including straight and w/ return options

LEARN MORE AT ALFREDLOCKS.COM

